


Si PIN photodiode

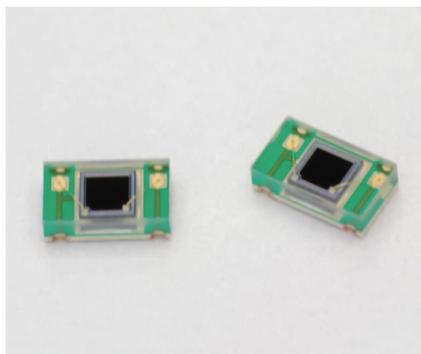

S10993-02CT

COB type, applicable to lead-free solder reflow

The S10993-02CT is a Si PIN photodiode for visible to near infrared range and is compatible with lead-free solder reflow processes. The small and thin leadless package allows reducing the mount area on a printed circuit board.

Features

- COB type
- Small package: 3.1 × 1.8 × 0.8^t mm
- Applicable to lead-free solder reflow
- Photosensitive area: 1.06 × 1.06 mm

Applications

- Optical switches

Structure

Parameter	Specification	Unit
Photosensitive area	1.06 × 1.06	mm
Package	Glass epoxy	-
Seal material	Silicone resin	-

Absolute maximum ratings

Parameter	Symbol	Condition	Value	Unit
Reverse voltage	V _R max	T _a =25 °C	10	V
Operating temperature	T _{opr}	No dew condensation*1	-25 to +85	°C
Storage temperature	T _{stg}	No dew condensation*1	-40 to +100	°C
Reflow soldering conditions*2	T _{sol}		Peak temperature 260 °C max., 2 times (see P.6)	-

*1: When there is a temperature difference between a product and the surrounding area in high humidity environment, dew condensation may occur on the product surface. Dew condensation on the product may cause deterioration in characteristics and reliability.


*2: JEDEC level 2a

Note: Exceeding the absolute maximum ratings even momentarily may cause a drop in product quality. Always be sure to use the product within the absolute maximum ratings.

Electrical and optical characteristics (T_a=25 °C)


Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Spectral response range	λ		-	380 to 1100	-	nm
Peak sensitivity wavelength	λ _p		-	960	-	nm
Photosensitivity	S	λ=650 nm	0.41	0.46	-	A/W
		λ=λ _p	-	0.6	-	
Short circuit current	I _{sc}	100 lx, 2856 K	-	1.2	-	μA
Dark current	I _D	V _R =2.5 V	-	0.02	1	nA
Cutoff frequency	f _c	V _R =2.5 V, λ=650 nm R _L =50 Ω, -3 dB	5	10	-	MHz
Terminal capacitance	C _t	V _R =2.5 V, f=1 MHz	-	6	12	pF

Spectral response

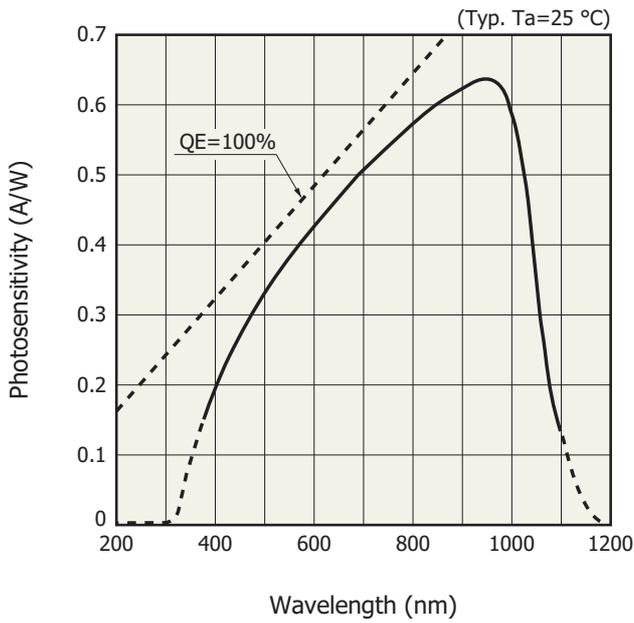


KPINB0390EA

Photosensitivity temperature characteristics

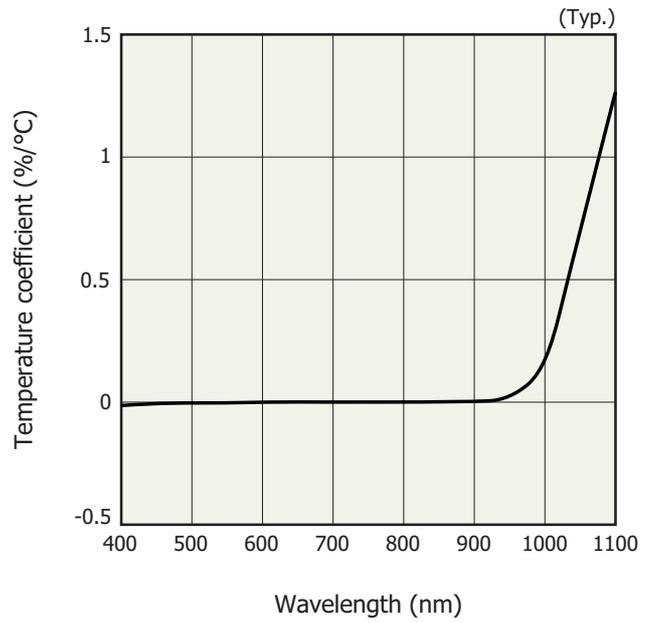


KPINB0398EB

Linearity

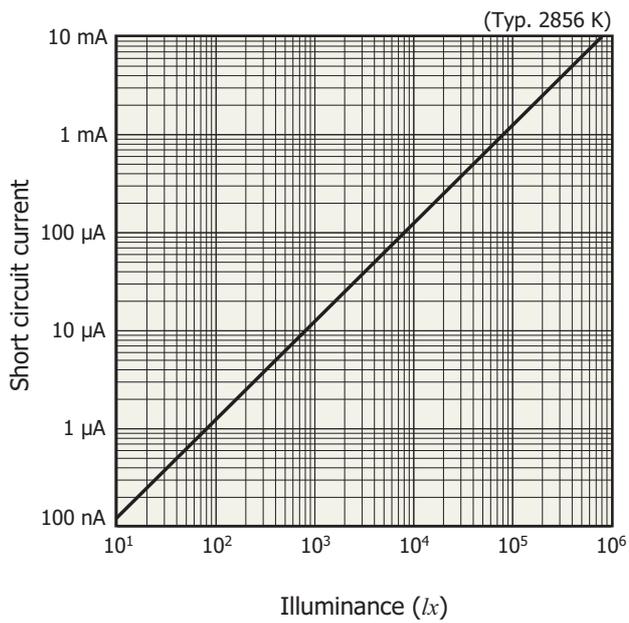


KPINB0397EA

Dark current vs. reverse voltage

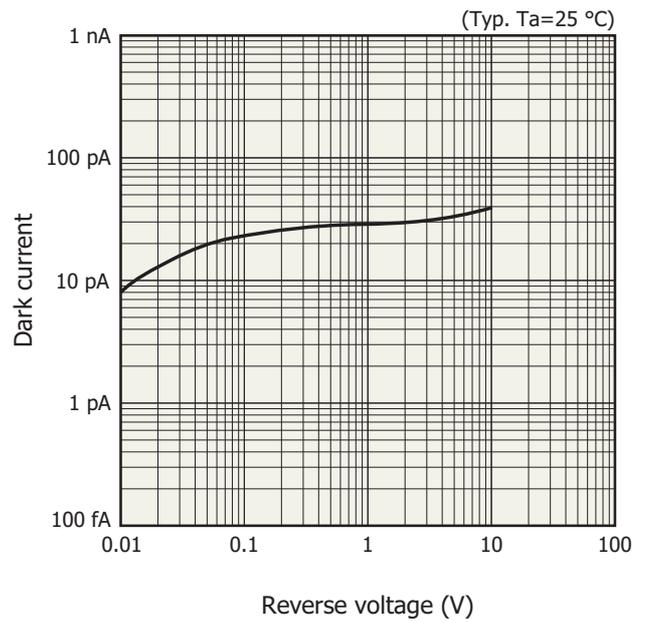


KPINB0391EA


Terminal capacitance vs. reverse voltage

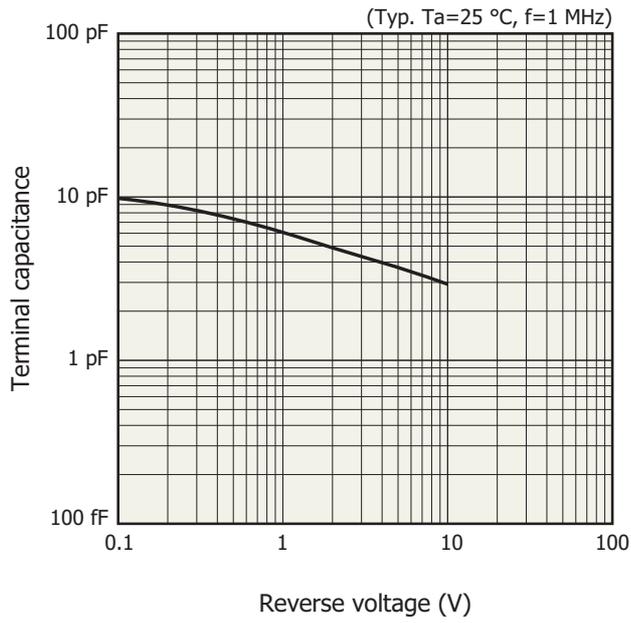

Directivity

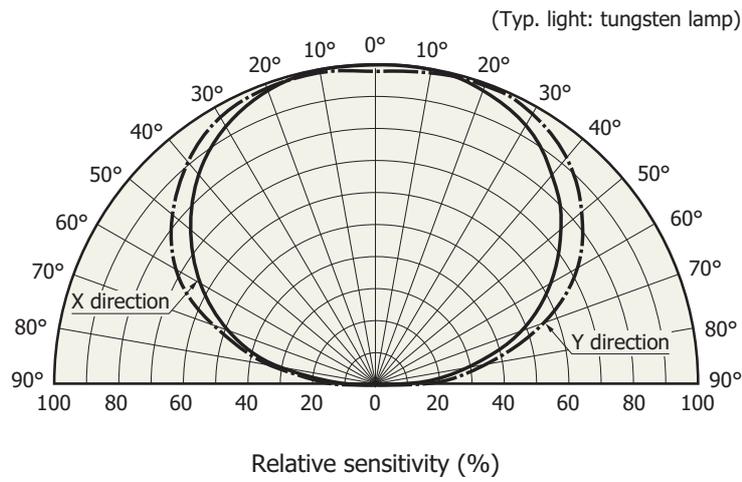


Dimensional outline (unit: mm)

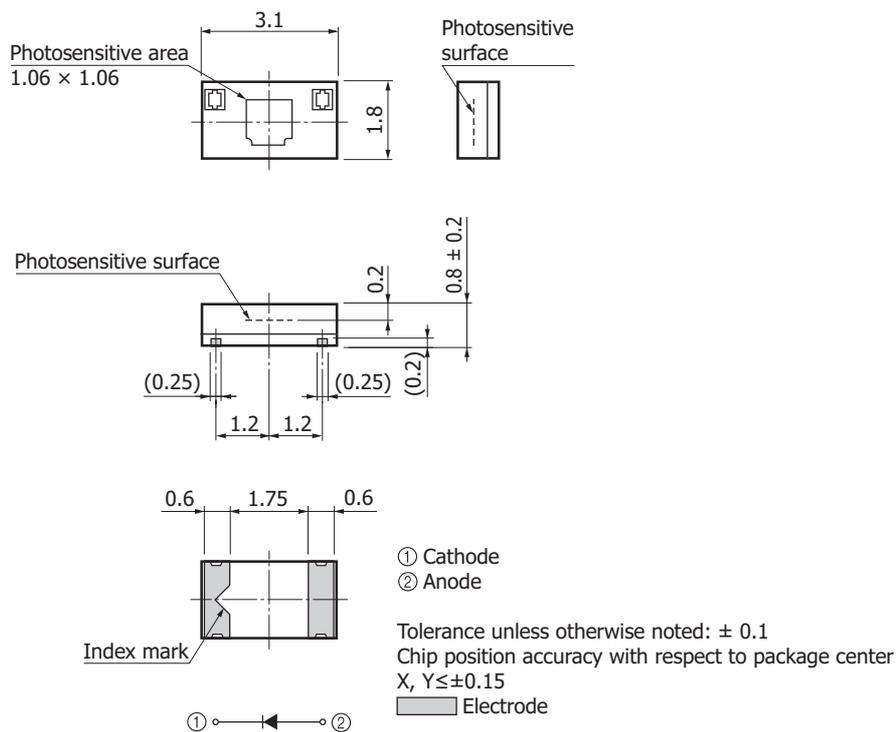

KPINA0118EA

Recommended land pattern (unit: mm)




Standard packing specifications

- Reel (conforms to JEITA ET-7200)

Dimensions	Hub diameter	Tape width	Material	Electrostatic characteristics
180 mm	60 mm	8 mm	PS	Conductive


- Embossed tape (unit: mm, material: PS, conductive)

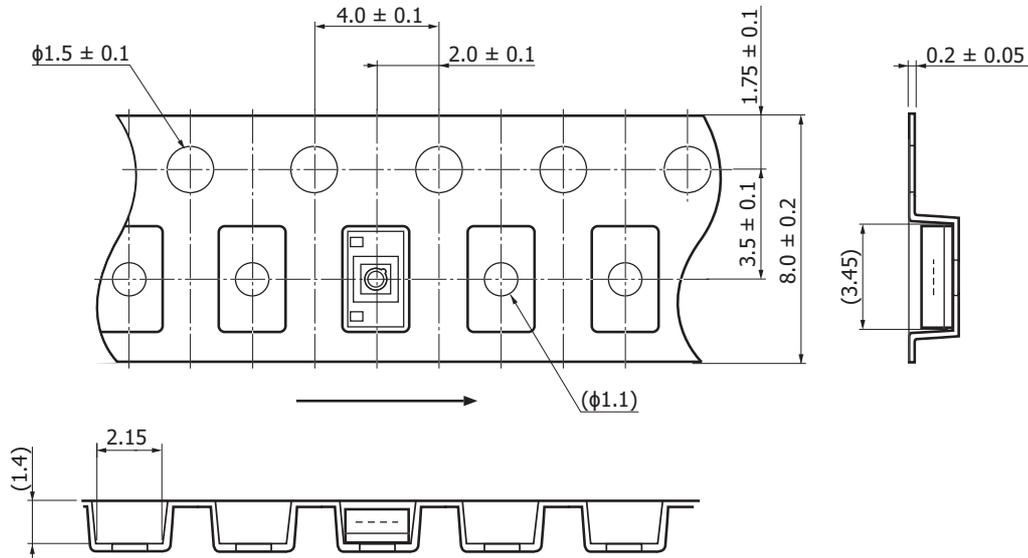

KPINCO023EA

- Packing quantity
3000 pcs/reel
- Packing type
Reel and desiccant in moisture-proof packaging (vacuum-sealed)

Measured example of temperature profile with our hot-air reflow oven for product testing

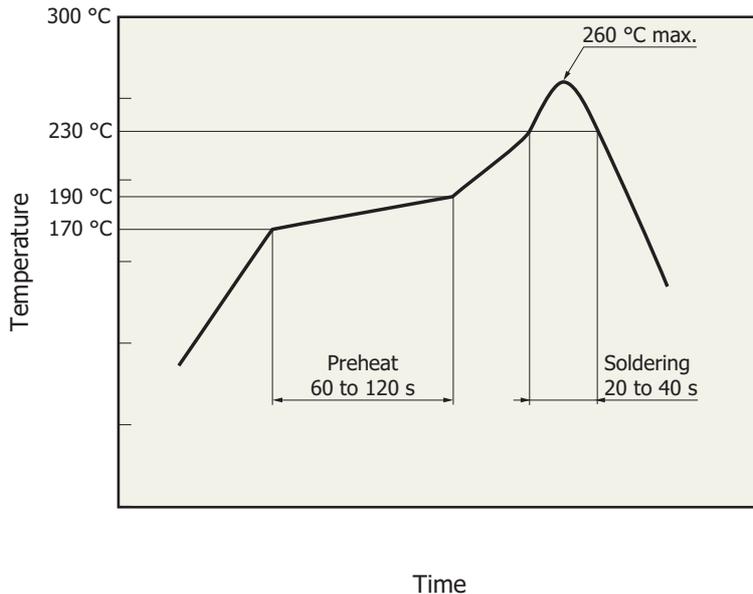

KPINB0403EB

- This product supports lead-free soldering. After unpacking, store it in an environment at a temperature of 30 °C or less and a humidity of 60% or less, and perform soldering within 4 weeks.
- The effect that the product receives during reflow soldering varies depending on the circuit board and reflow oven that are used. Before actual reflow soldering, check for any problems by testing out the reflow soldering methods in advance.

Precautions

Do not touch the silicone resin surface. As the silicone resin is soft, applying external force to it can cause damage to the resin surface and cause short circuit or broken circuit due to wire deformation.

Related information

www.hamamatsu.com/sp/ssd/doc_en.html

■ Precautions

- Disclaimer
- Surface mount type products

■ Technical information

- Si photodiode / Application circuit examples

Information described in this material is current as of February 2019.

Product specifications are subject to change without prior notice due to improvements or other reasons. This document has been carefully prepared and the information contained is believed to be accurate. In rare cases, however, there may be inaccuracies such as text errors. Before using these products, always contact us for the delivery specification sheet to check the latest specifications.

The product warranty is valid for one year after delivery and is limited to product repair or replacement for defects discovered and reported to us within that one year period. However, even if within the warranty period we accept absolutely no liability for any loss caused by natural disasters or improper product use. Copying or reprinting the contents described in this material in whole or in part is prohibited without our prior permission.

HAMAMATSU

www.hamamatsu.com

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81)53-434-3311, Fax: (81)53-434-5184

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, Bridgewater, N.J. 08807, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218, E-mail: usa@hamamatsu.com

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-265-8, E-mail: info@hamamatsu.de

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10, E-mail: infos@hamamatsu.fr

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44)1707-294888, Fax: (44)1707-325777, E-mail: info@hamamatsu.co.uk

North Europe: Hamamatsu Photonics Norden AB: Torshamnsgatan 35 16440 Kista, Sweden, Telephone: (46)8-509 031 00, Fax: (46)8-509 031 01, E-mail: info@hamamatsu.se

Italy: Hamamatsu Photonics Italia S.r.l.: Strada della Moia, 1 int. 6, 20020 Arese (Milano), Italy, Telephone: (39)02-93 58 17 33, Fax: (39)02-93 58 17 41, E-mail: info@hamamatsu.it

China: Hamamatsu Photonics (China) Co., Ltd.: B1201, Jiaming Center, No.27 Dongsanhuan Beilu, Chaoyang District, 100020 Beijing, P.R.China, Telephone: (86)10-6586-6006, Fax: (86)10-6586-2866, E-mail: hpc@hamamatsu.com.cn

Taiwan: Hamamatsu Photonics Taiwan Co., Ltd.: 8F-3, No. 158, Section2, Gongdao 5th Road, East District, Hsinchu, 300, Taiwan R.O.C. Telephone: (886)3-659-0080, Fax: (886)3-659-0081, E-mail: info@hamamatsu.com.tw